
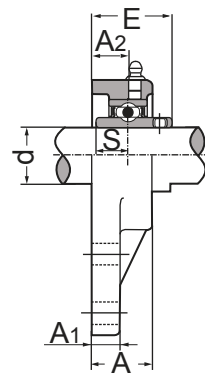


Flange Bracket Units

Stainless Steel - SSUCFB Series

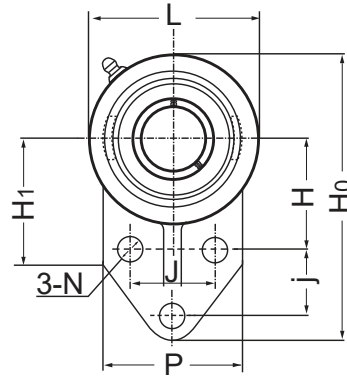

Also available with eccentric locking collar bearing

Unit No.	Shaft Dia. (inch / mm)	Dimensions (inch / mm)													Bolt Size	Bearing No.	Housing No.	Mass	
	d	H0	H1	L	P	H	j	J	A	A1	A2	N	E	S				kg	lbs
SSUCFB 201 201-8 202 202-10 203 204 204-12	12 mm 1/2 15 mm 5/8 17 mm 20 mm 3/4	 4-1/4 107.9	 2-1/16 52	 2-1/2 63.5	 2-1/2 63.5	 1-21/32 42	 7/8 22.2	 1-1/2 38.1	 1 25.4	 5/16 8.0	 5/8 15.9	 13/32 10.0	 1.3425 34.1	 0.500 12.7	 5/16 M8	SUC 201 201-8 202 202-10 203 204-12 204	SFB 204	0.70	1.54
SSUCFB 205-14 205-15 205 205-16	7/8 15/16 25 mm 1	 4-3/4 120.7	 2-1/16 52	 2-3/4 69.9	 2-1/2 63.5	 1-49/64 45.0	 1-1/8 28.6	 1-5/8 41.3	 1-1/8 28.6	 3/8 9.6	 21/32 16.7	 13/32 10.0	 1.4370 36.5	 0.5629 14.3	 5/16 M8	SUC 205-14 205-15 205 205-16	SFB 205	0.80	1.76
SSUCFB 206-18 206 206-19 206-20	1-1/8 30 mm 1-3/16 1-1/4	 5-3/8 136.5	 2-5/32 55	 3-1/4 82.6	 2-3/4 69.9	 1-31/32 52.4	 1-1/4 31.8	 1-7/8 47.6	 1-1/4 31.8	 3/8 9.6	 47/64 18.7	 13/32 10.0	 1.6102 40.9	 0.6259 15.9	 5/16 M8	SUC 206-18 206 206-19 206-20	SFB 206	1.00	2.20
SSUCFB 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 35 mm 1-7/16	 6-1/8 155.6	 2-7/16 62	 3-3/4 95.3	 3-1/4 82.6	 2-3/8 60.3	 1-1/4 31.8	 2 50.8	 1-7/16 36.5	 1/2 12.7	 13/16 21.0	 33/64 13.1	 1.8267 46.4	 0.6889 17.5	 5/16 M8	SUC 207-20 207-21 207-22 207 207-23	SFB 207	1.60	3.54
SSUCFB 208 208-24 208-25	40 mm 1-1/2 1-9/16	 6-15/32 164.3	 2-27/32 72	 3-15/16 100	 3-1/16 77.8	 2-23/64 60.0	 1-5/8 41.3	 1-31/32 50.0	 1-31/32 35.7	 5/8 15.9	 13/16 21.0	 15/32 12	 2.0157 51.2	 0.7480 19.0	 3/8 M10	SUC 208 208-24 208-25	SFB 208	1.78	3.92
SSUCFB 209 209-26 209-27 209-28	45 mm 1-5/8 1-11/16 1-3/4	 6-27/32 173.9	 3 76	 4-7/32 107.4	 3-5/32 80.2	 2-9/16 65	 1-11/16 42.9	 2-1/8 53.9	 1-1/2 38.1	 23/32 18.3	 55/64 21.8	 7/16 11.9	 2.0157 51.2	 0.7480 19	 3/8 M10	SUC 209 209-26 209-27 209-28	SFB 209	2.20	4.84
SSUCFB 210 210-30 210-31 210-32	50 mm 1-7/8 1-15/16 2	 7-1/2 190.5	 3-7/32 82	 4-5/8 117.5	 4 101.6	 2-43/64 68	 1-5/8 41.3	 2-3/4 69.9	 1-1/2 38.1	 23/32 18.3	 55/64 21.8	 33/64 13.1	 2.1102 53.6	 0.7480 19	 3/8 M10	SUC 210 210-30 210-31 210-32	SFB 210	2.50	5.50

Other sizes could be available upon request. Minimum quantity may apply.
Please refer to page 52 for setscrew maximum torque informations.