




# Bearing Insert

## Bearing Adapter Style - Normal Style

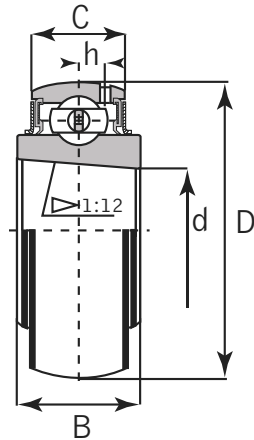

### UK

Part No.	Dimensions (inch / mm)					Basic Load Rating lbf / N		Weight	
	d	D	B	C	h	Dynamic	Static	kg	lbs
UK 205	0.9843 <b>25</b>	1.8504 <b>52</b>	0.9055 <b>23</b>	0.6693 <b>17</b>	0.1535 <b>3.9</b>	2878 14000	1495 7880	0.15	0.33
UK 206	1.1811 <b>30</b>	2.4409 <b>62</b>	1.0236 <b>26</b>	0.7480 <b>19</b>	0.1969 <b>5</b>	4384 19500	2518 11200	0.25	0.55
UK 207	1.3780 <b>35</b>	2.8346 <b>72</b>	1.1417 <b>29</b>	0.7874 <b>20</b>	0.2244 <b>5.7</b>	5777 25700	3417 15200	0.37	0.81
UK 208	1.1496 <b>40</b>	3.1496 <b>80</b>	1.2205 <b>31</b>	0.8268 <b>21</b>	0.2440 <b>6.2</b>	6654 29600	4091 18200	0.48	1.06
UK 209	1.5748 <b>45</b>	3.3465 <b>85</b>	1.2205 <b>31</b>	0.8661 <b>22</b>	0.2520 <b>6.4</b>	7160 31850	4676 20800	0.53	1.17
UK 210	1.9685 <b>50</b>	3.5433 <b>90</b>	1.2598 <b>32</b>	0.9055 <b>23</b>	0.2559 <b>6.5</b>	7890 35100	5215 23200	0.59	1.30
UK 211	2.1654 <b>55</b>	3.9370 <b>100</b>	1.3780 <b>35</b>	1.0630 <b>27</b>	0.2756 <b>7</b>	9790 43550	6564 29200	0.77	1.69
UK 212	2.3622 <b>60</b>	4.3307 <b>110</b>	1.4961 <b>38</b>	1.0630 <b>27</b>	0.2992 <b>7.6</b>	10745 47800	7373 32800	1.03	2.26
UK 213	2.5591 <b>65</b>	4.7244 <b>120</b>	1.5748 <b>40</b>	1.1024 <b>28</b>	0.3346 <b>8.5</b>	12859 57200	8992 40000	1.36	2.99
UK 215	2.9528 <b>75</b>	5.1181 <b>130</b>	1.7323 <b>44</b>	1.1811 <b>30</b>	0.3622 <b>9.2</b>	14837 66000	11128 49500	1.67	3.67
UK 216	3.1496 <b>80</b>	5.5118 <b>140</b>	1.7717 <b>45</b>	1.2598 <b>32</b>	0.3740 <b>9.5</b>	16073 71500	12184 54200	1.96	4.31
UK 217	3.3465 <b>85</b>	5.9055 <b>150</b>	1.8110 <b>46</b>	1.3386 <b>34</b>	0.4016 <b>10.2</b>	18703 83200	14342 63800	2.42	5.32
UK 218	3.5433 <b>90</b>	6.2992 <b>160</b>	1.8504 <b>47</b>	1.4173 <b>36</b>	0.4409 <b>11.2</b>	21558 95900	16073 71500	3.00	6.60