




# Two-Bolt Holes Flange Unit

Light Duty

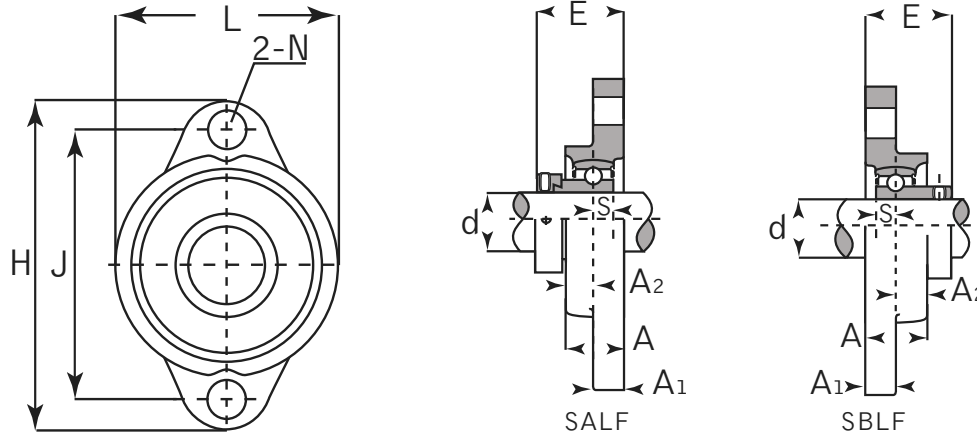

## SALF Eccentric Locking Collar SBLF Set Screw Locking

Unit No. SALF SBLF	Shaft Dia. (inch / mm)	Dimensions (inch / mm)							SALF		SBLF		Bolt Size	Bearing No. SA / SB	Housing No.	Weight	
		d	H	J	L	A	A1	A2	N	S	E	S				E	kg
201 201-8 202 202-10 203 203-11	12 mm 1/2 15 mm 5/8 17 mm 1 1/16	3-3/16 <b>81</b>	2-1/2 <b>63.5</b>	2-7/32 <b>56</b>	23/32 <b>18</b>	3/8 <b>9.5</b>	3/8 <b>9.5</b>	5/16 <b>8</b>	0.2559 <b>6.5</b>	1.260 <b>32</b>	0.2362 <b>6</b>	1.000 <b>25.5</b>	1/4 M 6	201 201-8 202 202-10 203 203-11	LF 203	0.30	0.66
204 204-12	20 mm 3/4	3-17/32 <b>90</b>	2-13/16 <b>71.5</b>	2-13/32 <b>61</b>	25/32 <b>20</b>	7/16 <b>11</b>	7/16 <b>11</b>	13/32 <b>10</b>	0.2952 <b>7.5</b>	1.319 <b>33.5</b>	0.2755 <b>7</b>	1.142 <b>29</b>	5/16 M 8	204 204-12	LF 204	0.40	0.88
205 205-14 205-15 205-16	25 mm 7/8 15/16 1	3-3/4 <b>95</b>	3 <b>76</b>	2-17/32 <b>64</b>	25/32 <b>20</b>	7/16 <b>11</b>	7/16 <b>11</b>	13/32 <b>10</b>	0.2952 <b>7.5</b>	1.339 <b>34</b>	0.2952 <b>7.5</b>	1.200 <b>30.5</b>	5/16 M 8	205 205-14 205-15 205-16	LF 205	0.50	1.10
206 206-18 206-19 206-20	30 mm 1-1/8 1-3/16 1-1/4	4-7/16 <b>113</b>	3-9/16 <b>90.5</b>	3 <b>76</b>	7/8 <b>22.5</b>	15/32 <b>12</b>	15/32 <b>12</b>	15/32 <b>12</b>	0.3543 <b>9</b>	1.492 <b>37.9</b>	0.3149 <b>8</b>	1.338 <b>34</b>	3/8 M 10	206 206-18 206-19 206-20	LF 206	0.70	1.54
207 207-20 207-21 207-22 207-23	35 mm 1-1/4 1-5/16 1-3/8 1-7/16	4-13/16 <b>122</b>	3-15/16 <b>100</b>	3-1/2 <b>89</b>	15/16 <b>24</b>	33/64 <b>13</b>	33/64 <b>13</b>	15/32 <b>12</b>	0.3740 <b>9.5</b>	1.614 <b>41</b>	0.3346 <b>8.5</b>	1.437 <b>36.5</b>	3/8 M 10	207 207-20 207-21 207-22 207-23	LF 207	0.90	1.98

Add (G)suffix for regreasable. (ex. SALF 205-16G)