


VULKOLLAN®

heavy-duty castors

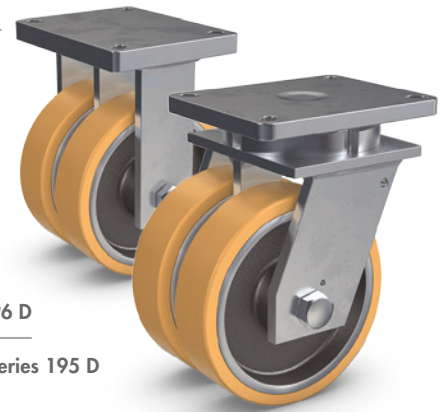

Series 196 D

Series 195 D



Article code



mm



mm



mm



mm



mm



mm



mm



kg

195 D/100/50/5	100	2 x 50	175	200 x 160	170 x 120/160 x 130	13	33	900
195 D/125/50/5	125	2 x 50	200	200 x 160	170 x 120/160 x 130	13	37	1.100
195 D/150/50/5	150	2 x 50	225	200 x 160	170 x 120/160 x 130	13	42	1.350
195 D/200/50/5	200	2 x 50	270	200 x 160	170 x 120/160 x 130	13	50	2.000
195 D/250/50/5	250	2 x 50	325	200 x 160	170 x 130/160 x 120	13	62	2.200
195 D/250/75/5	250	2 x 75	365	270 x 250	230 x 210/210 x 160	17	82	3.400
195 D/300/75/5	300	2 x 75	415	270 x 250	230 x 210/210 x 160	17	93	4.000
195 D/400/75/5	400	2 x 75	485	270 x 250	230 x 210/210 x 160	17	110	5.000

Heavy-duty twin wheel swivel castors with VULKOLLAN® wheels

Wheels series 178 with ball bearings (/5), see page 94.



Article code



mm



mm



mm



mm



mm



mm



mm




kg

196 D/100/50/5	100	2 x 50	175	200 x 160	170 x 120/160 x 130	13	900
196 D/125/50/5	125	2 x 50	200	200 x 160	170 x 120/160 x 130	13	1.100
196 D/150/50/5	150	2 x 50	225	200 x 160	170 x 120/160 x 130	13	1.350
196 D/200/50/5	200	2 x 50	270	200 x 160	170 x 120/160 x 130	13	2.000
196 D/250/50/5	250	2 x 50	325	200 x 160	170 x 130/160 x 120	13	2.200
196 D/250/75/5	250	2 x 75	365	270 x 250	230 x 210/210 x 160	17	3.400
196 D/300/75/5	300	2 x 75	415	270 x 250	230 x 210/210 x 160	17	4.000
196 D/400/75/5	400	2 x 75	485	270 x 250	230 x 210/210 x 160	17	5.000

Heavy-duty twin wheel fixed castors

Plate alignment: Long side is parallel with wheel axle.




wheel locking device
Code: 195 D RF/...



4-way directional lock
Code: 195 D/...4RIF



wheel and directional lock
Code: 195 D RF/...4RIF



foot protection
Code: ...PRO



Precision heavy-duty swivel castor brackets with a load capacity of up to 5,000 kg

Housings in precise highly stable welded steel construction. Swivel head with a high quality thrust ball bearing and a tapered roller bearing for the guidance of the kingpin. All bearing parts dust and splash proof. Wheel locking on the non-trailing side of the housing.