


# Stainless steel institutional castors

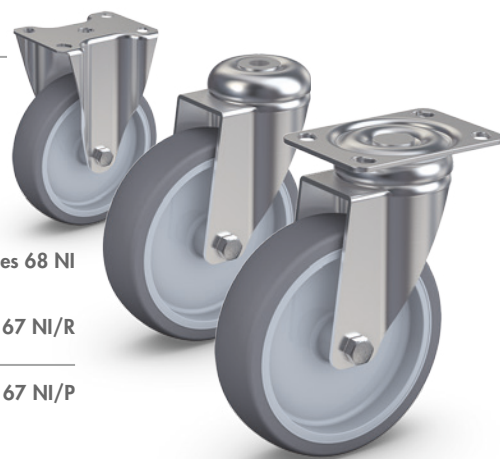

Series 68 NI

Series 67 NI/R

Series 67 NI/P

Article code	mm	mm	mm	mm	mm	mm	mm	mm	kg
67 NI/075/25/1/P	75	25	107	95 x 70	75 x 45/72 x 52	9	-	33	60
67 NI/100/32/1/P	100	32	135	95 x 70	75 x 45/72 x 52	9	-	41	80
67 NI/125/32/1/P	125	32	161	95 x 70	75 x 45/72 x 52	9	-	39	100
67 NI/075/30/5R/P	75	30	107	95 x 70	75 x 45/72 x 52	9	-	33	60
67 NI/100/32/5R/P	100	32	135	95 x 70	75 x 45/72 x 52	9	-	41	80
67 NI/125/32/5R/P	125	32	161	95 x 70	75 x 45/72 x 52	9	-	39	100
67 NI/075/25/1/R	75	25	104	-	-	-	10	33	60
67 NI/100/32/1/R	100	32	132	-	-	-	12	41	80
67 NI/125/32/1/R	125	32	158	-	-	-	12	39	100
67 NI/075/30/5R/R	75	30	104	-	-	-	10	33	60
67 NI/100/32/5R/R	100	32	132	-	-	-	12	41	80
67 NI/125/32/5R/R	125	32	158	-	-	-	12	39	100

Fixing devices for institutional swivel castors with bold hole fitting(/R), see page 127.


## Stainless steel institutional swivel castors with thermoplastic rubber wheels

Wheels series 85 with plain bearing (/1) or stainless steel ball bearing (/5R), see page 130.

Article code	mm	mm	mm	mm	mm	mm	kg
68 NI/075/25/1/P	75	25	107	95 x 77	75 x 45/72 x 52	9	60
68 NI/100/32/1/P	100	32	135	95 x 77	75 x 45/72 x 52	9	80
68 NI/125/32/1/P	125	32	161	95 x 77	75 x 45/72 x 52	9	100
68 NI/075/30/5R/P	75	30	107	95 x 77	75 x 45/72 x 52	9	60
68 NI/100/32/5R/P	100	32	135	95 x 77	75 x 45/72 x 52	9	80
68 NI/125/32/5R/P	125	32	161	95 x 77	75 x 45/72 x 52	9	100

## Stainless steel institutional fixed castors

Matching the swivel castors with top plate (/P).



## Institutional swivel castor brackets with a load capacity of up to 100 kg

Housings made of polished stainless steel. Swivel head with double ball bearing and riveted kingpin. Available with either plate (P) or bolt hole (R) fitting. ALLSTOP total locking device on the trailing side of the housing, blocks rolling and swivel motion simultaneously.

ALLSTOP total locking device  
Code: 67 F NI/.../P

single bolt hole/total lock  
Code: 67 F NI/.../R

