

Ball units



Series 701

Ball units with steel housing

Housing bright zinc plated steel or stainless steel. Steel, nylon (N) or stainless steel (R) load ball.

 Article code	Ball Ø mm	D mm	D1 mm	H mm	h mm	a mm	b mm	Hole Ø mm	Bolt hole spacing mm	 kg
701-20/0-F2	20	29	61	22	10	3	7	5	45	25
701-25/0-F2	25	38	73	30	14	3	8	5	56	55
701-32/0-F2	32	46	73	36	16	4	8	5	59	125
701-40/0-F2	40	56	89	46	22	6	13	7	70	140
701-50/0-F3	50	75	121	59	29	6	14	8	92	340


with nylon ball, zinc housing

701 N-20/0-F2	20	29	61	22	10	3	7	5	45	20
701 N-25/0-F2	25	38	73	30	14	3	8	5	56	25

stainless steel housing and ball

701 R-20/0-F2	20	29	61	22	10	3	7	5	45	25
701 R-25/0-F2	25	38	73	30	14	3	8	5	56	55
701 R-32/0-F2	32	46	73	36	16	4	8	5	59	125
701 R-40/0-F2	40	56	89	46	22	6	13	7	70	140
701 R-50/0-F3	50	75	121	59	29	6	14	8	92	340

F2 = 2-Fixing holes, F3 = 3-Fixing holes

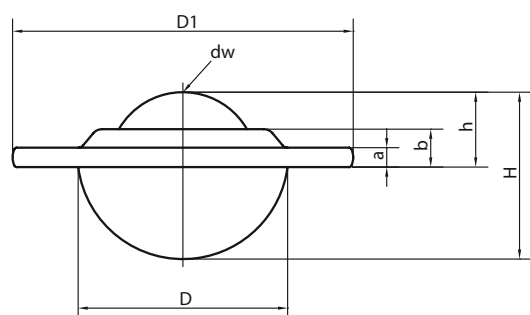

Design Series 701