



VULKOLLAN® press-on tyres

Series 179 K

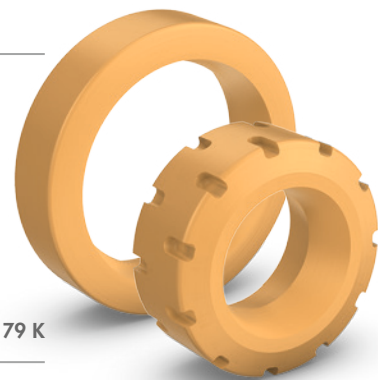


 Article code	 mm	 W mm	 d mm	 km/ks	 kg
179 K/125/050/075	125	50	75	km 15	540
179 K/150/050/100	150	50	100	km 15	640
179 K/160/050/100	160	50	100	km 15	680
179 K/180/050/120	180	50	120	km 15	760
179 K/180/100/105	180	100	105	km 08	1.520
179 K/200/050/140	200	50	140	km 15	840
179 K/200/085/105	200	85	105	km 15	1.440
179 K/200/085/105 P	200	85	105	km 15	1.440
179 K/250/060/170	250	60	170	km 15	1.260
179 K/285/100/200	285	100	200	km 08	2.400
179 K/300/075/220	300	75	220	km 15	1.800
179 K/310/075/200	310	75	200	km 15	1.860
179 K/343/114/225	343	114	225	km 08	3.120
179 K/300/096/231	300	96	231	ks 23/9	2.300
179 K/310/120/200	310	120	200	ks 15/6	2.980
179 K/343/140/225	343	140	225	ks 15/6	3.840
179 K/406/178/267	406	178	267	ks 15/6	5.400

P = tread



**km = conical base tyre
centre split (symmetrical)**

km 15 = α 15°
km 8 = α 8°



**ks = conical base tyre
laterally split (asymmetrical)**

ks 15/6 = α 15°, β 6°
ks 23/9 = α 23°, β 9°