


PE·VO·DYN®-Soft

heavy-duty castors

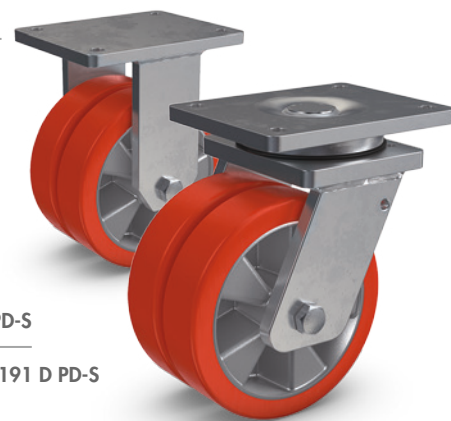

Series 192 D PD-S

Series 191 D PD-S

Article code	mm	mm	mm	mm	mm	mm	mm	kg
191 D PD-S/125/50/5	125	2 x 50	180	175 x 140	140 x 105	15	49	900
191 D PD-S/150/50/5	150	2 x 50	210	200 x 160	160 x 120	15	50	1.100
191 D PD-S/200/50/5	200	2 x 50	260	200 x 160	160 x 120	15	60	1.320
191 D PD-S/250/60/5 ¹	250	2 x 60	320	250 x 200	210 x 160	19	70	2.200
191 D PD-S/250/80/5 ¹	250	2 x 80	320	250 x 200	210 x 160	19	70	2.920
191 D PD-S/300/80/5 ¹	300	2 x 80	380	250 x 200	210 x 160	19	80	3.520

Heavy-duty twin wheel swivel castors with PEVODYN®-SOFT wheels


Wheels series 183 ALU PD-S/ 178 PD-S with ball bearings (/5), see page 92.

Article code	mm	mm	mm	mm	mm	mm	kg
192 D PD-S/125/50/5 ²	125	2 x 50	180	175 x 140	140 x 105	15	900
192 D PD-S/150/50/5	150	2 x 50	210	200 x 160	160 x 120	15	1.100
192 D PD-S/200/50/5	200	2 x 50	260	200 x 160	160 x 120	15	1.320
192 D PD-S/250/60/5 ¹	250	2 x 60	320	250 x 200	210 x 160	19	2.200
192 D PD-S/250/80/5 ^{1,2}	250	2 x 80	320	250 x 200	210 x 160	19	2.920
192 D PD-S/300/80/5 ^{1,2}	300	2 x 80	380	250 x 200	210 x 160	19	3.520

Heavy-duty twin wheel fixed castors

¹ rim made of grey cast iron

² Plate alignment: Long side is parallel with wheel axle.



Precision heavy-duty swivel castor brackets with a load capacity of up to 3,520 kg

Housings in precise highly stable welded steel construction. Swivel head with a high quality thrust ball bearing and a tapered roller bearing for the guidance of the kingpin. All bearing parts dust and splash proof. Wheel locking on the non-trailing side of the housing.

wheel locking device
Code: 191 D RF PD-S/...



4-way directional lock
Code: 191 D PD-S/...4RIF



wheel and directional lock
Code: 191 D RF PD-S/...4RIF



foot protection
Code: ...PRO

